

515 W

MAXIMUM POWER OUTPUT

0/+5 W

POSITIVE POWER TOLERANCE

23.2 %

MAXIMUM EFFICIENCY



Optimal Size for Commercial & Industrial Rooftops

- Compact module design with medium size for lower total system cost and shorter payback time
- Low voltage design for high string power



Lightweight Dual-glass Design, High Reliability

- Excellent fire resistance; durability in harsh environmental conditions and high temperature or high humidity areas
- Up to 5,400 Pa snow load and 2,400 Pa wind load (test loads)
- 25 years product warranty



Maximized Energy Harvest

- High module power: Up to 515 W, 23.2 % module efficiency with n type i-TOPCon technology
- Maximum 1 % first-year degradation and 0.4 % annual degradation
- 30 years power warranty



Universal Solution for Rooftop Systems

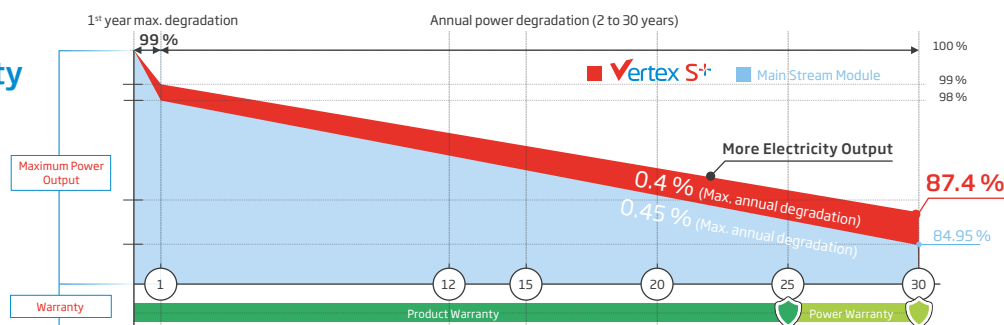
- Designed for compatibility with existing mainstream inverters, optimizers and mounting systems
- Easy to handle (length below 2 meters) and install on roofs with excellent size and light weight
- Flexible installation solutions for system deployment

Extended Vertex S⁺ Warranty

1 %
1st year max. degradation

0.4 %
Max. annual degradation from year 2 to 30

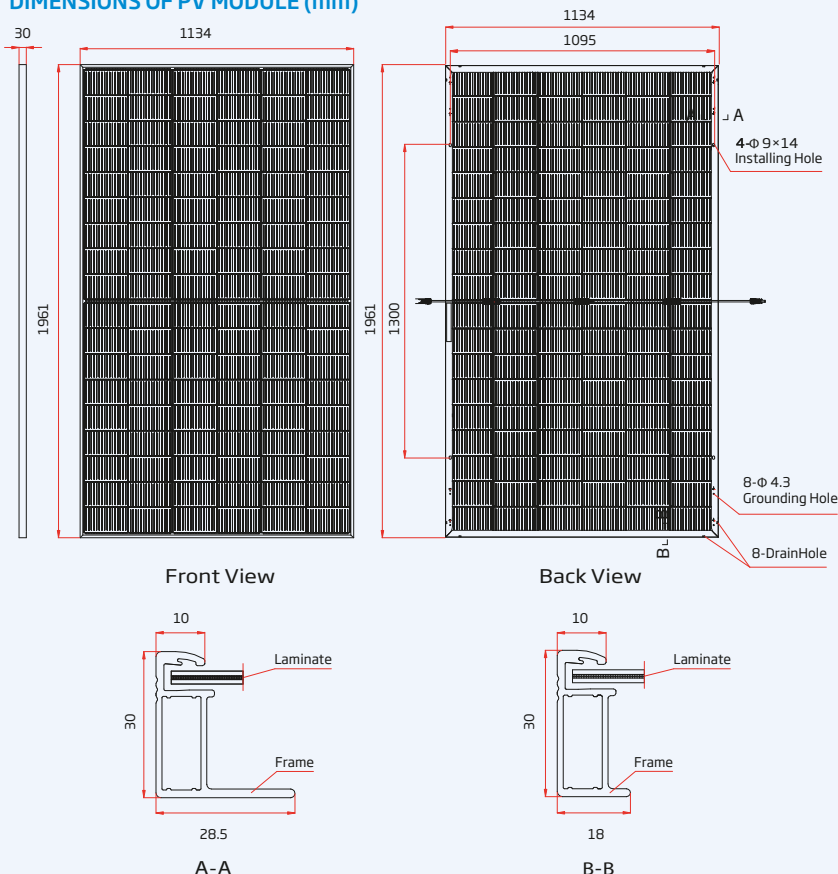
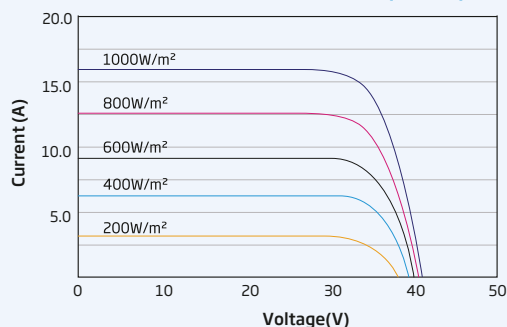
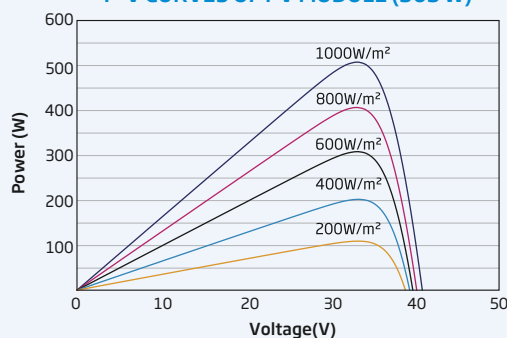
25 Years
Product Workmanship Warranty



Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System

DIMENSIONS OF PV MODULE (mm)

I-V CURVES OF PV MODULE (505 W)

P-V CURVES OF PV MODULE (505 W)

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	108 cells
Module Dimensions	1961×1134×30 mm
Weight	23.5 kg
Front Glass	1.6 mm, High Transmission, AR Coated Heat Strengthened Glass
Back Glass	1.6 mm, Heat Strengthened Glass

Frame	30 mm Anodized Aluminium Alloy, Black
J-Box	IP 68 rated, 3 bypass diodes
Cables	Photovoltaic Technology Cable 4.0 mm² Landscape: 1300/1300 mm Portrait: 280/350 mm*
Connector	TS4 Plus / TS4 / MC4 EVO2*

*Special order only

ELECTRICAL DATA (STC & NOCT & BNPI)

	TSM-490 NEG18RC.27			TSM-495 NEG18RC.27			TSM-500 NEG18RC.27			TSM-505 NEG18RC.27			TSM-510 NEG18RC.27			TSM-515 NEG18RC.27		
Testing Condition	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
Peak Power Watts-P _{MAX} (Wp)*	490	375	542	495	378	548	500	382	554	505	386	559	510	390	565	515	394	570
Power Selection (W)**	0 ~ +5																	
Maximum Power Voltage-V _{MPP} (V)	32.9	31.0	32.9	33.1	31.3	33.1	33.3	31.5	33.3	33.5	31.8	33.5	33.7	31.9	33.7	33.9	32.2	33.9
Maximum Power Current-I _{MPP} (A)	14.91	12.06	16.47	14.97	12.08	16.55	15.03	12.11	16.63	15.09	12.15	16.68	15.14	12.21	16.78	15.2	12.23	16.83
Open Circuit Voltage-V _{OC} (V)	39.6	37.6	39.6	39.8	37.7	39.8	40.1	38.0	40.1	40.3	38.3	40.3	40.6	38.5	40.6	40.9	38.8	40.9
Short Circuit Current-I _{SC} (A)	15.80	12.74	17.51	15.83	12.76	17.57	15.86	12.78	17.61	15.89	12.81	17.65	15.93	12.84	17.65	15.96	12.86	17.68
Module Efficiency η _m (%)	22.0			22.3			22.5			22.7			22.9			23.2		

STC: Irradiance 1000 W/m², Cell Temperature 25 °C, Air Mass AM1.5. NOCT: Irradiance at 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s. BNPI: Irradiance front 1000 W/m², rear 135 W/m², Temperature 25 °C, Air Mass AM1.5. *Measuring tolerance: ±3 %. **Power selection up to: +3 %

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (reference to 5 % & 10 % backside power gain)

	5 %		10 %		5 %		10 %		5 %		10 %		5 %		10 %		5 %		10 %	
Backside Power Gain	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %	5 %	10 %
Total Equivalent power -P _{MAX} (Wp)	515	539	520	545	525	550	530	556	536	561	541	567	541	567	541	567	541	567	541	567
Maximum Power Voltage-V _{MPP} (V)	32.9	32.9	33.1	33.1	33.3	33.3	33.5	33.5	33.7	33.7	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9
Maximum Power Current-I _{MPP} (A)	15.66	16.40	15.72	16.47	15.78	16.53	15.84	16.60	15.90	16.65	15.96	16.72	15.96	16.72	15.96	16.72	15.96	16.72	15.96	16.72
Open Circuit Voltage-V _{OC} (V)	39.6	39.6	39.8	39.8	40.1	40.1	40.3	40.3	40.6	40.6	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9
Short Circuit Current-I _{SC} (A)	16.59	17.38	16.62	17.41	16.65	17.45	16.68	17.48	16.73	17.52	16.76	17.56	16.76	17.56	16.76	17.56	16.76	17.56	16.76	17.56

Power Bifaciality: 80 ±5 %.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43 °C (±2 °C)
Temperature Coefficient of P _{MAX}	-0.29 %/ °C
Temperature Coefficient of V _{OC}	-0.24 %/ °C
Temperature Coefficient of I _{SC}	0.04 %/ °C

MAXIMUM RATINGS

Operational Temperature	-40~+70 °C
Maximum System Voltage	1500 V DC (IEC)
Max Series Fuse Rating	30 A

WARRANTY

25 year Product Workmanship Warranty
 30 year Power Warranty
 1 % first year degradation
 0.4 % Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
 Modules per 40' container: 864 pieces

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2025 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice. The right of final interpretation belongs to Trina Solar Co., Ltd.

Version number: TSM_EN_2025_PA4_preliminary

www.trinasolar.com